

## MODEL : K275VS

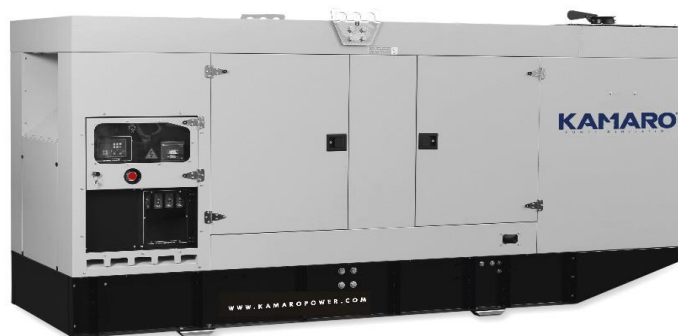


Image provided for illustrative purposes only

Power Rating		
Standby power LTP	kVA	275,0
Prime power PRP	kVA	251,5

Main Features		
Frequency	Hz	50
Voltage	V	400/230V
Power factor	cos $\phi$	0,8
Phase and connection		3

Main Specifications		
Engine Make & Model	Volvo	TAD734GE
Speed Governor		Electronic
Alternator Make & Model	Mecc Alte	ECO38-1LN/4
Fuel Tank (ltrs) / Autonomy @75% load (hrs)	636	14
Noise Level - dB(A)@7mt		68
Dimensions	L x W x H (mm)	3951x1438x2085
Weight	Kg	2990

### General Structure

Engine/alternator monoblock unit coupled and mounted via adequately sized, anti-vibration mountings to Welded Steel Profile Base Frame with welded or screwed support legs. Fuel Tank with filler neck, air breather, minimum fuel level sensor.

- Soundproof canopy made up of modular panels, realized with zinc steel as treatment against corrosion and aggressive conditions, properly fixed and sealed allowing a full weatherproof enclosure.
- Easy access to the genset for maintenance purposes thanks to: Wide lateral access doors fixed by stainless steel hinges and provided with plastic lockable handles and internal perforated galvanized steel-sheet; Detachable panels, with screws holes protected by rubber tap.
- Control panel protection door provided with suitable window and lockable handle.
- Lateral air inlet opening properly protected and soundproofed. Exhaust air outlet from the roof, through wet section protected by proper grid.
- Double lifting points frame structure.
- Noise attenuation thanks to soundproofing material (rock wool)
- Efficient residential silencer placed inside the canopy

## TECHNICAL DATA SHEET

Engine		
Brand		Volvo
Model		TAD734GE
Speed Governor		Electronic
Max power PRP	kW	227
R.P.M.		1500
Cylinders		6 in line
Displacement	cm <sup>3</sup>	7150
Fuel consumption at 75% of load	l/h	44,6
Cooling System		Water
Aspiration		Turbocharged-intercooled

ALTERNATOR		
Brand		Mecc Alte
Model		ECO38-1LN/4
Pole		4
Stator/rotator insulation		H
Protection level	IP	23

PHYSICAL CHARACTERISTICS		
Integrated fuel tank	LTR	636
Lead acid batteries		12V155AH
Dimensions	W x L x H (mm)	3951x1438x2085
Weight	Kg	2990

Noise Level dB(A) LWA		
Guaranteed Noise Level	dB(A) LWA	97
Noise Pressure Level	@ 7 mt	68

**ACP - Automatic control panel**

Mounted on the genset, complete with digital control unit AC03 for monitoring, control and protection of the generating set, protected through door with lockable handle.

**COMMANDS AND OTHERS**

- Four operation modes: OFF - Manual starting - Automatic starting - Automatic test.
- Push-button for forcing Mains contactor or Genset contactor.
- Push-buttons: start/stop, fault reset, up/down/page/enter selection.
- Remote starting availability.
- DC system disconnection switch.
- Acoustic alarm.
- Automatic battery charger.
- RS232 Communication port.
- Settable PASSWORD for protection level.

**ALARM PROTECTION**

- Engine protection: low fuel level, low oil pressure, high engine temperature.
- Genset protection: under/over voltage, overload, under/over frequency, starting failure, under/over battery voltage

**SHUT DOWN PROTECTION**

- Engine protection: low fuel level, low oil pressure, high engine temperature,
- Genset protection: under/over voltage, overload, under/over battery voltage, battery charger failure.
- Circuit breaker protection: III poles.
- Earth Fault included in the control unit.

**OTHERS PROTECTION**

- Emergency stop button.
- Panel protected through door with lockable handle.

**OUTPUT PANEL ACP**

Plinth row for connection from ACP to LTS panel.  
 External Terminal Board (ETB) Standard



**LTS - LOAD TRANSFER SWITCH - Accessories ACP**

Nominal Current	A	400
Width (W)	mm	800
Height (H)	mm	600
Depth (D)	mm	300